


Modern Aire Ventilating

Fully Customizable. Built in the USA.



PML Spec Sheet

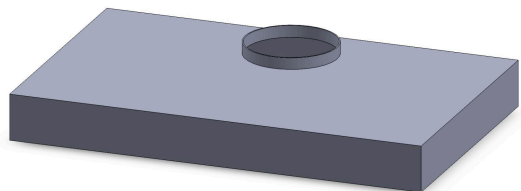

Available Standard Sizing

****Custom sizing and venting options available upon request. Please contact a dealer for more information****

PML18-28	28 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d
PML18-34	34 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d
PML18-40	40 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d
PML18-46	46 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d
PML18-52	52 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d
PML18-58	58 $\frac{3}{8}$ "w x 4"h x 18 $\frac{1}{8}$ "d

PML22-28	28 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d
PML22-34	34 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d
PML22-40	40 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d
PML22-46	46 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d
PML22-52	52 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d
PML22-58	58 $\frac{3}{8}$ "w x 4"h x 22 $\frac{1}{2}$ "d

****Blower Not Included****

Available Material Choices

****See available materials list for a full selection****

Stainless Steel	Brass
RAL Powder Coat	Copper
Custom Powder Coat	Zinc

Blower and Controls

Fan Type	Internal, Inline, External
CFM Options	200 CFM - 1400 CFM
Standard Venting	Top - Centered & 1" off rear
Fan Switch	Continuously Variable (5A Rheostat)
Fan Control Type	Variable Chrome Knob
Control Location	Underside

Lights and Controls

Light Type	3000K LED
Amount	2+ (varies based upon width)
Light Switch	Continuously Variable (5A Rheostat)
Light Control Type	Variable Chrome Knob
Control Location	Underside

Filters

Type	Brushed Stainless Steel Mesh Filters
Removable	Yes
Dishwasher Safe	Yes


Electrical

Circuit Breaker	10 Amps
Volts	120 Volts
Wiring	Hardwired
Standard Location	Top - Right of Blower

Warranty Information




Parts and Labor	3 Years
-----------------	---------



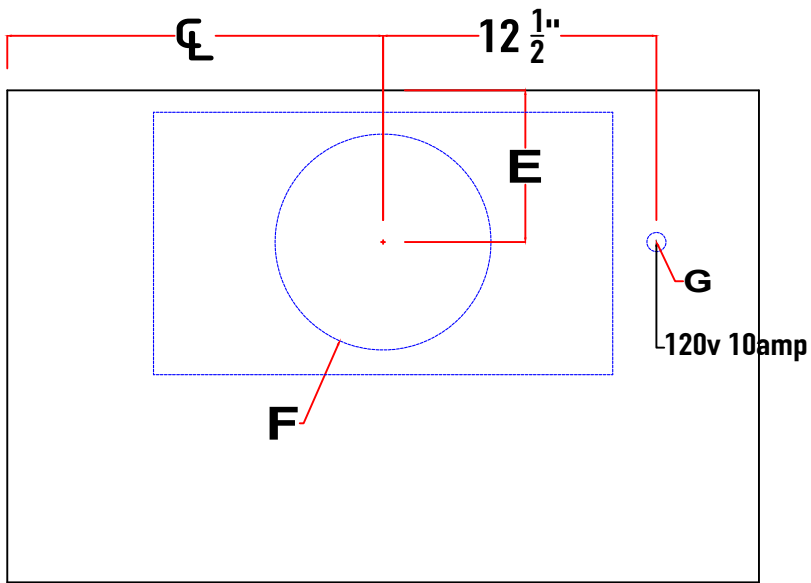


Top View

Model#
PML18

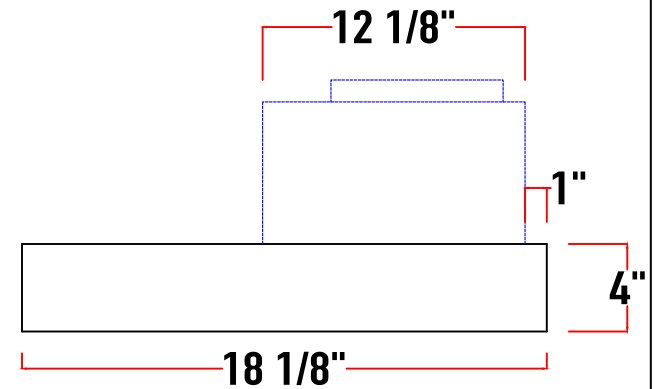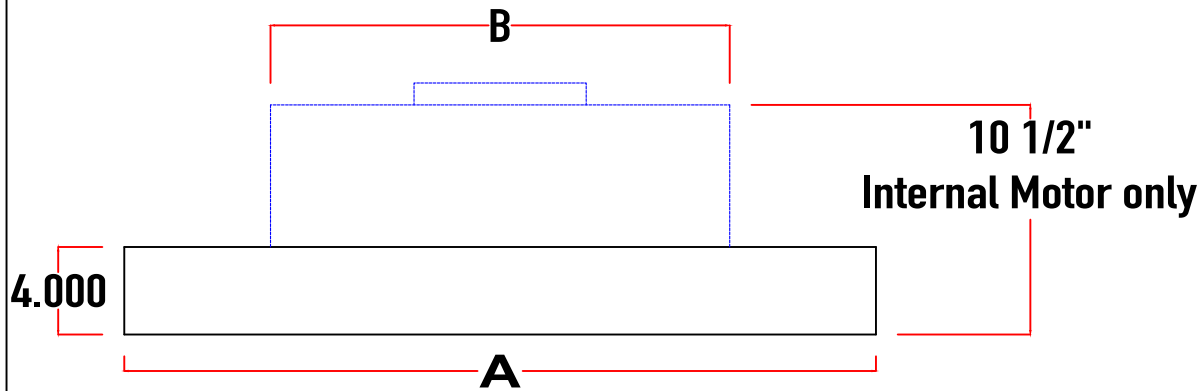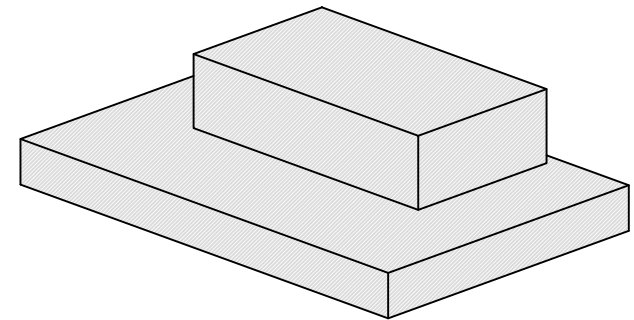




A	28 ³ / ₈ "	34 ³ / ₈ "	40 ³ / ₈ "	46 ³ / ₈ "	52 ³ / ₈ "	58 ³ / ₈ "
B	14" (200cfm - 600cfm); 21" (900cfm - 1200cfm)					
C						
D						

E	5 1/2" (200cfm - 450cfm) 6" (600cfm) 7" (900cfm - 1200cfm) 7" (external motor)
F	7" (200cfm - 450cfm) 8" (600cfm) 10" (900cfm - 1200cfm) 10" or 8" (external)
G	Hard Wired, 120V 10A
H	

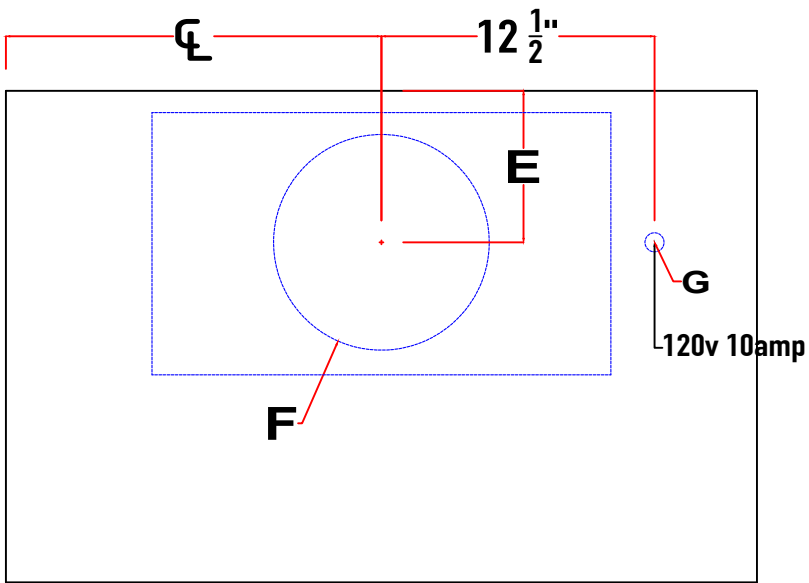

Top View

Model#
PML22

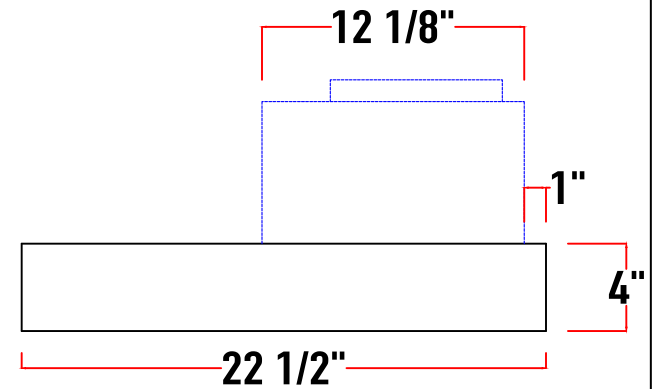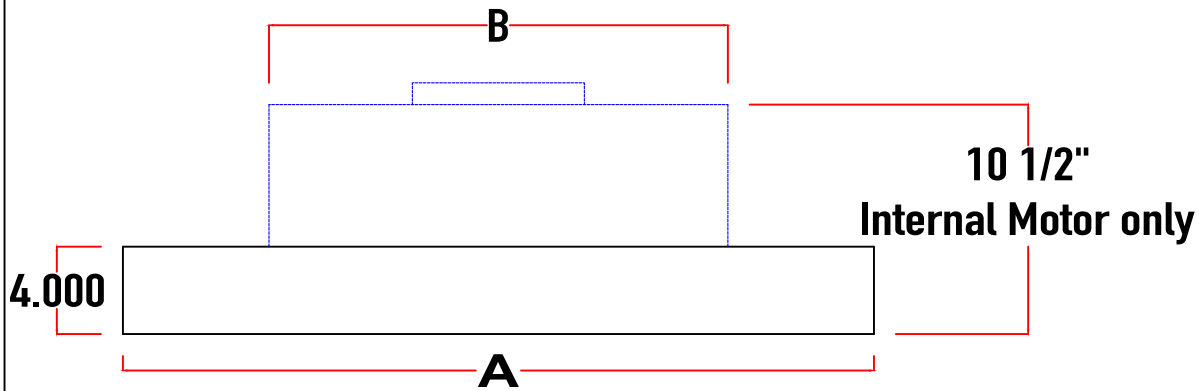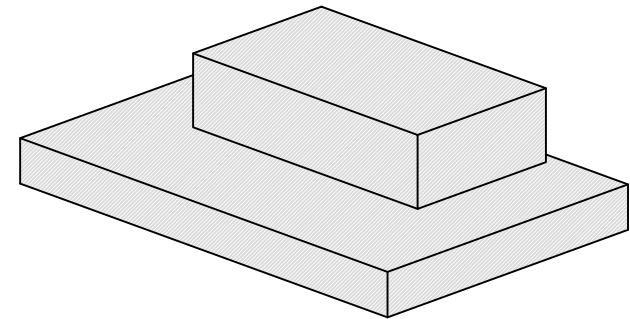

A	28 ³ / ₈ "	34 ³ / ₈ "	40 ³ / ₈ "	46 ³ / ₈ "	52 ³ / ₈ "	58 ³ / ₈ "
B	14" (200cfm - 600cfm); 21" (900cfm - 1200cfm)					
C						
D						

E	5 1/2" (200cfm - 450cfm) 6" (600cfm) 7" (900cfm - 1200cfm) 7" (external motor)
F	7" (200cfm - 450cfm) 8" (600cfm) 10" (900cfm - 1200cfm) 10" or 8" (external)
G	Hard Wired, 120V 10A
H	